


MGS STAINLESS STEEL

Innovative design, with the following features:

- TrimLine Design 5 & 7 GPM of 3 3/4"
- Floating Stack Design - for outstanding abrasives sand handling capability
- Patented Signa Seal Staging, Harder-Than-Sand Ceramic Wear Surface
- **"300" Grade Stainless Steel** suction and discharge / durability in aggressive water
- Acetal Impellers — Polycarbonate Diffusers
- Internal Check Valve
- Heat Shrink included
- 5 year warranty - up to 1 1/2 hp - included



Model Number	H.P.	Volts	Stages	Discharge	List
B5P4MS05131	1/2	115	14	1 1/4"	\$2154.00
B5P4MS05121	1/2	115 2WIRE	14	1 1/4"	\$2533.00
B5P4MS05231	1/2	230	14	1 1/4"	\$2262.00
B5P4MS05221	1/2	230 2WIRE	14	1 1/4"	\$2533.00
B5P4MS07231	3/4	230	19	1 1/4"	\$2741.00
B5P4MS07221	3/4	230 2WIRE	19	1 1/4"	\$3116.00
B5P4MS10231	1	230	22	1 1/4"	\$3174.00
B5P4MS15231	1 1/2	230	30	1 1/4"	\$3832.00
B7P4MS05131	1/2	115	11	1 1/4"	\$2006.00
B7P4MS05121	1/2	115 2WIRE	11	1 1/4"	\$2217.00
B7P4MS05231	1/2	230	11	1 1/4"	\$2219.00
B7P4MS05221	1/2	230 2WIRE	11	1 1/4"	\$2217.00
B7P4MS07231	3/4	230	15	1 1/4"	\$2473.00
B7P4MS07221	3/4	230 2WIRE	15	1 1/4"	\$22759.00
B7P4MS10231	1	230	18	1 1/4"	\$3107.00
B7P4MS15231	1 1/2	230	22	1 1/4"	\$3753.00

***CONTROL BOX NOT INCLUDED. SEE PAGE 3-15 & 3-16**
PRICES SUBJECT TO CHANGE WITHOUT NOTICE

2025



STANLEY PUMP SUPPLY LTD.

"Suppliers of Quality Water Well Products."

J SERIES by



Innovative design, with the following features:

- TrimLine Design 5 & 7 GPM of 3 3/4"
- Floating Stack Design - for outstanding abrasives sand handling capability
- Patented Signa Seal Staging, Harder-Than-Sand Ceramic Wear Surface
- **Fiberglass reinforced thermoplastic** suction and discharge / durability in aggressive water
- Acetal Impellers — Polycarbonate Diffusers
- Internal Check Valve
- Heat Shrink included
- 5 year warranty - up to 1 1/2 hp - included



	Model Number	H.P.	Volts	Stages	List
5GPM	B5P4JP05121	1/2	115 2WIRE	14	\$2134.00
	B5P4JP05221	1/2	230 2WIRE	14	\$2241.00
	B5P4JP05231	1/2	230 3WIRE	14	\$1825.00
	B5P4JP07221	3/4	230 2WIRE	19	\$2560.00
	B5P4JP07231	3/4	230 3WIRE	19	\$2272.00
	B5P4JP10231	1	230 3WIRE	22	\$2750.00
7GPM	B7P4JP05121	1/2	115 2WIRE	11	\$2119.00
	B7P4JP05221	1/2	230 2WIRE	11	\$1916.00
	B7P4JP05231	1/2	230 3WIRE	11	\$1725.00
	B7P4JP07221	3/4	230 2WIRE	15	\$2336.00
	B7P4JP07231	3/4	230 3WIRE	15	\$2301.00
	B7P4JP10231	1	230 3 WIRE	18	\$2730.00
10GPM	B10P4JP05121	1/2	115 2WIRE	8	\$1682.00
	B10P4JP05221	1/2	230 2WIRE	8	\$1682.00
	B10P4JP05231	1/2	230 3WIRE	8	\$1622.00
	B10P4JP07221	3/4	230 2WIRE	11	\$2054.00
	B10P4JP07231	3/4	230 3WIRE	11	\$2052.00
	B10P4JP10231	1	230 3WIRE	13	\$2435.00



***CONTROL BOX NOT INCLUDED. SEE PAGE 3-18 & 3-19**
PRICES SUBJECT TO CHANGE WITHOUT NOTICE



STANLEY PUMP SUPPLY LTD.
"Suppliers of Quality Water Well Products."

2025

PUMP PERFORMANCE for MGS / J SERIES

5 GPM (Capacity in U.S. Gallons Per Minute)

PUMP PERFORMANCE / CAPACITY IN GALLONS PER MINUTE																																			
5 GALLONS PER MINUTE																																			
HP	PSI	Pumping Depth in Feet																												Shut-Off Head					
		8	20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	320	340	360	380	400	450	500	550	600	650	700	750	800	850	Feet	PSI		
1/2	0	-	-	-	-	-	-	-	7.3	7.0	6.8	6.5	6.2	5.9	5.6	5.2	4.9	4.4	4.0	3.5	2.9	2.1	-	-	-	-	-	-	-	-	-	-	-	421	182
	20	-	-	-	-	7.5	7.2	7.0	6.7	6.4	6.1	5.8	5.5	5.1	4.7	4.3	3.9	3.3	2.7	1.7	-	-	-	-	-	-	-	-	-	-	-	-			
	30	-	-	-	7.4	7.2	6.9	6.6	6.4	6.1	5.7	5.4	5.1	4.7	4.2	3.8	3.2	2.5	1.5	-	-	-	-	-	-	-	-	-	-	-	-	-			
	40	-	-	7.4	7.1	6.9	6.6	6.3	6.0	5.7	5.4	5.0	4.6	4.2	3.7	3.1	2.4	1.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	50	-	7.4	7.1	6.8	6.6	6.3	6.0	5.6	5.3	4.9	4.5	4.1	3.6	3.0	2.3	1.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	60	7.3	7.1	6.8	6.5	6.2	5.9	5.6	5.3	4.9	4.5	4.0	3.5	2.9	2.1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	70	7.0	6.8	6.5	6.2	5.9	5.5	5.2	4.8	4.4	4.0	3.4	2.8	2.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	80	6.7	6.4	6.1	5.8	5.5	5.1	4.8	4.3	3.9	3.4	2.7	1.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
3/4	0	-	-	-	-	-	-	-	-	7.4	7.2	7.0	6.8	6.6	6.4	6.2	6.0	5.7	5.5	5.2	5.0	4.2	3.2	1.8	-	-	-	-	-	-	-	-	571	247	
	20	-	-	-	-	-	-	-	7.3	7.1	7.0	6.8	6.6	6.3	6.1	5.9	5.7	5.4	5.1	4.9	4.6	4.3	3.3	2.0	-	-	-	-	-	-	-	-			-
	30	-	-	-	-	-	7.5	7.3	7.1	6.9	6.7	6.5	6.3	6.1	5.9	5.6	5.4	5.1	4.8	4.5	4.2	3.9	2.8	-	-	-	-	-	-	-	-	-			
	40	-	-	-	-	7.5	7.3	7.1	6.9	6.7	6.5	6.3	6.1	5.8	5.6	5.3	5.1	4.8	4.5	4.2	3.8	3.4	2.1	-	-	-	-	-	-	-	-	-			
	50	-	-	-	7.4	7.3	7.1	6.9	6.7	6.5	6.2	6.0	5.8	5.5	5.3	5.0	4.7	4.4	4.1	3.7	3.3	2.9	-	-	-	-	-	-	-	-	-	-			
	60	-	-	7.4	7.2	7.0	6.8	6.6	6.4	6.2	6.0	5.7	5.5	5.2	5.0	4.7	4.4	4.1	3.7	3.3	2.8	2.2	-	-	-	-	-	-	-	-	-	-			-
	70	-	7.4	7.2	7.0	6.8	6.6	6.4	6.2	5.9	5.7	5.5	5.2	4.9	4.6	4.3	4.0	3.6	3.2	2.7	2.1	1.2	-	-	-	-	-	-	-	-	-	-			
	80	7.4	7.2	7.0	6.8	6.6	6.4	6.1	5.9	5.7	5.4	5.2	4.9	4.6	4.3	3.9	3.6	3.1	2.6	2.0	-	-	-	-	-	-	-	-	-	-	-	-			
1	0	-	-	-	-	-	-	-	-	7.5	7.3	7.1	7.0	6.8	6.6	6.4	6.3	6.1	5.9	5.7	5.1	4.5	3.8	2.8	1.2	-	-	-	-	-	-	-	661	286	
	20	-	-	-	-	-	-	-	7.4	7.3	7.1	6.9	6.7	6.6	6.4	6.2	6.0	5.8	5.6	5.4	5.2	4.5	3.8	2.9	1.4	-	-	-	-	-	-	-			
	30	-	-	-	-	-	7.5	7.4	7.2	7.1	6.9	6.7	6.5	6.4	6.2	6.0	5.8	5.6	5.3	5.1	4.9	4.2	3.4	2.3	-	-	-	-	-	-	-	-			
	40	-	-	-	-	7.5	7.4	7.2	7.0	6.9	6.7	6.5	6.3	6.1	5.9	5.7	5.5	5.3	5.1	4.8	4.6	3.9	3.0	1.6	-	-	-	-	-	-	-	-			
	50	-	-	-	7.5	7.3	7.2	7.0	6.8	6.7	6.5	6.3	6.1	5.9	5.7	5.5	5.3	5.0	4.8	4.5	4.3	3.5	2.4	-	-	-	-	-	-	-	-	-			
	60	-	-	7.5	7.3	7.2	7.0	6.8	6.6	6.5	6.3	6.1	5.9	5.7	5.5	5.2	5.0	4.8	4.5	4.2	3.9	3.1	1.7	-	-	-	-	-	-	-	-	-			
	70	-	-	7.4	7.3	7.1	7.0	6.8	6.6	6.4	6.2	6.1	5.9	5.6	5.4	5.2	5.0	4.7	4.5	4.2	3.9	3.6	2.5	-	-	-	-	-	-	-	-	-			
	80	-	7.4	7.3	7.1	6.9	6.8	6.6	6.4	6.2	6.0	5.8	5.6	5.4	5.2	4.9	4.7	4.4	4.1	3.8	3.5	3.1	1.9	-	-	-	-	-	-	-	-	-			
1 1/2	0	-	-	-	-	-	-	-	-	-	-	-	-	7.5	7.4	7.3	7.2	7.1	6.9	6.8	6.7	6.4	6.0	5.6	5.2	4.8	4.3	3.8	3.1	2.2	-	901	390		
	20	-	-	-	-	-	-	-	-	-	7.5	7.4	7.3	7.1	7.0	6.9	6.8	6.6	6.5	6.4	6.0	5.7	5.3	4.8	4.3	3.8	3.2	2.3	-	-	-			-	
	30	-	-	-	-	-	-	-	-	7.5	7.4	7.2	7.1	7.0	6.9	6.8	6.6	6.5	6.4	6.2	5.9	5.5	5.1	4.6	4.1	3.5	2.8	1.8	-	-	-			-	
	40	-	-	-	-	-	-	-	7.5	7.3	7.2	7.1	7.0	6.9	6.7	6.6	6.5	6.3	6.2	6.1	5.7	5.3	4.9	4.4	3.8	3.2	2.4	-	-	-	-			-	
	50	-	-	-	-	-	7.7	7.6	7.4	7.3	7.2	7.1	7.0	6.8	6.7	6.6	6.5	6.3	6.2	6.0	5.9	5.5	5.1	4.6	4.1	3.6	2.9	1.9	-	-	-			-	
	60	-	-	-	-	-	7.5	7.4	7.3	7.2	7.1	6.9	6.8	6.7	6.6	6.4	6.3	6.2	6.0	5.9	5.7	5.3	4.9	4.4	3.9	3.3	2.5	-	-	-	-			-	
	70	-	-	-	-	7.5	7.4	7.3	7.2	7.1	6.9	6.8	6.7	6.5	6.4	6.3	6.1	6.0	5.8	5.7	5.5	5.1	4.7	4.2	3.6	2.9	2.0	-	-	-	-			-	
	80	-	-	-	7.5	7.4	7.3	7.2	7.0	6.9	6.8	6.7	6.5	6.4	6.3	6.1	6.0	5.8	5.7	5.5	5.4	4.9	4.5	3.9	3.3	2.5	1.3	-	-	-	-			-	

HP	PSI	Pumping Depth in Feet																								Shut-Off Head			
		20	40	60	80	100	125	150	175	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	Feet	PSI
2	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.8	6.5	6.2	5.9	5.5	5.0	4.5	4.0	3.3	2.4			1120	485
	20	-	-	-	-	-	-	-	-	-	-	-	-	-	6.8	6.5	6.2	5.9	5.5	5.0	4.5	4.0	3.3	2.4					
	30	-	-	-	-	-	-	-	-	-	-	-	-	-	6.6	6.3	6.0	5.7	5.2	4.8	4.3	3.7	2.9	2.1					
	40	-	-	-	-	-	-	-	-	-	-	-	-	-	6.8	6.5	6.2	5.9	5.5	5.0	4.5	4.0	3.3	2.4					
	50	-	-	-	-	-	-	-	-	-	-	-	-	-	6.6	6.4	6.1	5.8	5.4	4.9	4.4	3.9	3.1	2.2					
	60	-	-	-	-	-	-	-	-	-	-	-	-	-	6.8	6.5	6.2	6.0	5.6	5.1	4.6	4.1	3.2	2.5					



STANLEY PUMP SUPPLY LTD.

"Suppliers of Quality Water Well Products."

PUMP PERFORMANCE for MGS / J SERIES

7 GPM (Capacity in U.S. Gallons Per Minute)

PUMP PERFORMANCE (CAPACITY IN GALLONS PER MINUTE)																															
7 GALLONS PER MINUTE																															
HP	PSI	Pumping Depth in Feet																				Shot-Off Head									
		0	20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	320	340	360	380	400	450	500	550	600	650	700	Feet	PSI	
1/2	0	-	11.0	10.7	10.4	10.0	9.7	9.3	8.9	8.6	8.1	7.7	7.2	6.7	6.2	5.6	5.0	4.2	3.3	-	-	-	-	-	-	-	-	-	-	372	161
	20	10.6	10.3	9.9	9.6	9.2	8.8	8.4	8.0	7.6	7.1	6.6	6.0	5.4	4.7	3.9	2.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	30	10.2	9.9	9.5	9.2	8.8	8.4	7.9	7.5	7.0	6.5	5.9	5.3	4.6	3.8	2.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	40	9.8	9.5	9.1	8.7	8.3	7.9	7.4	6.9	6.4	5.9	5.2	4.5	3.7	2.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	50	9.4	9.0	8.6	8.2	7.8	7.3	6.9	6.3	5.8	5.1	4.4	3.5	2.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	60	9.0	8.6	8.2	7.7	7.3	6.8	6.2	5.7	5.0	4.3	3.3	2.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	70	8.5	8.1	7.7	7.2	6.7	6.2	5.6	4.9	4.1	3.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	80	8.0	7.6	7.1	6.6	6.1	5.5	4.8	4.0	3.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3/4	0	-	-	10.9	10.6	10.4	10.2	9.9	9.6	9.4	9.1	8.8	8.5	8.2	7.9	7.6	7.2	6.9	6.5	6.1	5.7	5.2	3.8	-	-	-	-	-	-	507	220
	20	10.8	10.4	10.3	10.1	9.8	9.6	9.3	9.0	8.7	8.4	8.1	7.8	7.5	7.1	6.8	6.4	6.0	5.5	5.0	4.5	3.9	-	-	-	-	-	-	-	-	-
	30	10.5	10.3	10.0	9.8	9.5	9.2	9.0	8.7	8.4	8.1	7.8	7.4	7.1	6.7	6.3	5.9	5.5	5.0	4.4	3.8	3.0	-	-	-	-	-	-	-	-	-
	40	10.2	10.0	9.7	9.5	9.2	8.9	8.6	8.3	8.0	7.7	7.4	7.0	6.6	6.3	5.8	5.4	4.9	4.3	3.7	2.9	-	-	-	-	-	-	-	-	-	-
	50	10.0	9.7	9.4	9.2	8.9	8.6	8.3	8.0	7.7	7.3	7.0	6.6	6.2	5.8	5.3	4.8	4.2	3.6	2.8	-	-	-	-	-	-	-	-	-	-	-
	60	9.7	9.4	9.1	8.8	8.5	8.2	7.9	7.6	7.3	6.9	6.5	6.1	5.7	5.2	4.7	4.1	3.5	2.6	-	-	-	-	-	-	-	-	-	-	-	-
	70	9.4	9.1	8.8	8.5	8.2	7.9	7.6	7.2	6.8	6.5	6.1	5.6	5.2	4.6	4.0	3.3	2.5	-	-	-	-	-	-	-	-	-	-	-	-	-
	80	9.0	8.8	8.5	8.2	7.8	7.5	7.2	6.8	6.4	6.0	5.6	5.1	4.5	3.9	3.2	2.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1	0	-	-	11.0	10.8	10.6	10.4	10.2	9.9	9.7	9.5	9.3	9.1	8.8	8.6	8.3	8.1	7.8	7.5	7.2	6.9	6.6	5.8	4.8	3.5	-	-	-	-	608	263
	20	10.9	10.7	10.5	10.3	10.1	9.9	9.7	9.4	9.2	9.0	8.7	8.5	8.2	8.0	7.7	7.4	7.1	6.8	6.5	6.2	5.8	4.9	3.6	-	-	-	-	-	-	-
	30	10.7	10.5	10.3	10.1	9.8	9.6	9.4	9.2	8.9	8.7	8.5	8.2	7.9	7.7	7.4	7.1	6.8	6.5	6.1	5.8	5.4	4.3	2.8	-	-	-	-	-	-	-
	40	10.4	10.2	10.0	9.8	9.6	9.4	9.1	8.9	8.7	8.4	8.2	7.9	7.6	7.4	7.1	6.8	6.4	6.1	5.7	5.3	4.9	3.7	-	-	-	-	-	-	-	-
	50	10.2	10.0	9.8	9.6	9.3	9.1	8.9	8.6	8.4	8.1	7.9	7.6	7.3	7.0	6.7	6.4	6.0	5.7	5.3	4.9	4.4	3.0	-	-	-	-	-	-	-	-
	60	10.0	9.7	9.5	9.3	9.1	8.8	8.6	8.3	8.1	7.8	7.5	7.3	7.0	6.7	6.3	6.0	5.6	5.2	4.8	4.3	3.8	-	-	-	-	-	-	-	-	-
	70	9.7	9.5	9.3	9.0	8.8	8.6	8.3	8.0	7.8	7.5	7.2	6.9	6.6	6.3	5.9	5.6	5.2	4.7	4.3	3.7	3.1	-	-	-	-	-	-	-	-	-
	80	9.5	9.2	9.0	8.8	8.5	8.3	8.0	7.7	7.5	7.2	6.9	6.6	6.2	5.9	5.5	5.1	4.7	4.2	3.6	3.0	2.1	-	-	-	-	-	-	-	-	-
1 1/2	0	-	-	11.0	10.9	10.7	10.5	10.4	10.2	10.0	9.9	9.7	9.5	9.3	9.1	8.9	8.8	8.6	8.3	8.1	7.9	7.7	7.1	6.5	5.8	5.0	4.0	2.7	-	764	322
	20	11.0	10.8	10.7	10.5	10.3	10.2	10.0	9.8	9.6	9.5	9.3	9.1	8.9	8.7	8.5	8.3	8.1	7.9	7.6	7.4	7.2	6.5	5.8	5.0	4.1	2.8	-	-	-	-
	30	10.8	10.6	10.5	10.3	10.1	10.0	9.8	9.6	9.4	9.2	9.1	8.9	8.7	8.5	8.3	8.0	7.8	7.6	7.4	7.1	6.9	6.2	5.5	4.6	3.5	-	-	-	-	-
	40	10.6	10.4	10.3	10.1	9.9	9.8	9.6	9.4	9.2	9.0	8.8	8.6	8.4	8.2	8.0	7.8	7.6	7.3	7.1	6.8	6.6	5.9	5.1	4.2	2.9	-	-	-	-	-
	50	10.4	10.2	10.1	9.9	9.7	9.6	9.4	9.2	9.0	8.8	8.6	8.4	8.2	8.0	7.8	7.5	7.3	7.1	6.8	6.5	6.3	5.5	4.7	3.6	2.1	-	-	-	-	-
	60	10.2	10.1	9.9	9.7	9.5	9.3	9.2	9.0	8.8	8.6	8.4	8.2	7.9	7.7	7.5	7.3	7.0	6.8	6.5	6.2	5.9	5.2	4.2	3.0	-	-	-	-	-	-
	70	10.0	9.9	9.7	9.5	9.3	9.1	8.9	8.7	8.5	8.3	8.1	7.9	7.7	7.5	7.2	7.0	6.7	6.5	6.2	5.9	5.6	4.8	3.7	2.3	-	-	-	-	-	-
	80	9.8	9.6	9.5	9.3	9.1	8.9	8.7	8.5	8.3	8.1	7.9	7.6	7.4	7.2	6.9	6.7	6.4	6.1	5.9	5.5	5.2	4.3	3.1	-	-	-	-	-	-	-

HP	PSI	Pumping Depth in Feet																								Shut-Off Head							
		20	40	60	80	100	125	150	175	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	Feet	PSI			
2	0	-	-	-	-	-	-	-	-	-	9.7	9.4	9.0	8.7	8.4	8.0	7.4	7.1	6.4	5.8	5.0	4.2	2.8								900	389	
	20	-	-	-	-	-	-	-	-	9.7	9.4	9.1	8.7	8.4	8.0	7.6	7.1	6.6	5.8	5.1	4.3	3.8											
	30	-	-	-	-	-	-	-	9.7	9.5	9.2	8.9	8.6	8.3	7.9	7.4	6.9	6.2	5.5	4.7	3.8												
	40	-	-	-	-	-	-	-	9.6	9.4	9.1	8.7	8.5	8.1	7.7	7.2	6.6	5.9	5.2	4.2	3.2												
	50	-	-	-	-	-	-	9.6	9.4	9.3	8.9	8.7	8.3	7.9	7.4	6.9	6.3	5.5	4.8	4.0	2.3												
	60	-	-	-	-	-	9.6	9.4	9.3	9.1	8.8	8.5	8.1	7.7	7.2	6.7	6.0	5.8	4.5	3.3													
3	0	-	-	-	-	-	-	-	-	-	-	9.5	9.3	9.0	8.8	8.6	8.3	8.0	7.6	7.3	6.8	6.4	5.7	5.2	4.7	3.9	2.5				1150	498	
	20	-	-	-	-	-	-	-	-	-	-	9.5	9.3	9.0	8.8	8.6	8.3	8.1	7.7	7.4	6.9	6.5	5.8	5.2	4.8	4.0	3.1						
	30	-	-	-	-	-	-	-	-	9.6	9.4	9.2	8.9	8.7	8.4	8.1	7.9	7.4	7.0	6.6	6.0	5.4	5.8	4.3	3.5								
	40	-	-	-	-	-	-	-	-	9.6	9.4	9.1	8.8	8.6	8.3	8.1	7.8	7.4	7.0	6.5	5.9	5.3	4.9	4.2	3.2								
	50	-	-	-	-	-	-	-	9.7	9.4	9.2	8.9	8.7	8.5	8.1	7.9	7.5	7.1	6.6	6.1	5.5	5.1	4.4	3.6									
	60	-	-	-	-	-	-	9.7	9.6	9.4	9.1	8.9	8.7	8.4	8.1	7.8	7.4	7.0	6.6	5.9	5.3	4.9	4.2	3.3									



STANLEY PUMP SUPPLY LTD.
"Suppliers of Quality Water Well Products."

2025



MGS STAINLESS STEEL

10 G.P.M.

Model #	H.P.	Volts	Phases	Stages	Disch.	Wt.	List
B10P4MS05131	1/2	115	1	8	1 1/4"	34	\$2123.00
B10P4MS05121	1/2	115 2WIRE	1	8	1 1/4"	34	\$2369.00
B10P4MS05231	1/2	230	1	8	1 1/4"	34	\$2123.00
B10P4MS05221	1/2	230 2WIRE	1	8	1 1/4"	34	\$2142.00
B10P4MS07231	3/4	230	1	11	1 1/4"	37	\$2230.00
B10P4MS07221	3/4	230 2WIRE	1	11	1 1/4"	37	\$2423.00
B10P4MS10231	1	230	1	13	1 1/4"	40	\$2758.00
B10P4MS15231	1 1/2	230	1	17	1 1/4"	44	\$3575.00

***CONTROL BOX NOT INCLUDED. SEE PAGE 3-18 & 3-19**
PRICES SUBJECT TO CHANGE WITHOUT NOTICE

PLEASE CALL FOR PRICING ON 2-5 HP MODELS

2025



STANLEY PUMP SUPPLY LTD.

"Suppliers of Quality Water Well Products."

PUMP PERFORMANCE for MGS / J SERIES

10 GPM (Capacity in U.S. Gallons Per Minute)

PUMP PERFORMANCE (CAPACITY IN GALLONS PER MINUTE)																													
10 GALLONS PER MINUTE																													
HP	PSI	Pumping Depth in Feet																										Shut-off Head	
		0	20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	320	340	360	380	400	450	500	550	Feet	PSI		
1/2	0	-	-	-	-	-	14.7	13.8	12.9	11.8	10.7	9.4	8.0	6.3	4.1	-	-	-	-	-	-	-	-	-	-	-	278	120	
	20	-	-	-	14.4	13.5	12.5	11.5	10.3	9.0	7.5	5.7	3.2	-	-	-	-	-	-	-	-	-	-	-	-	-			
	30	-	-	14.3	13.4	12.4	11.3	10.1	8.8	7.3	5.4	2.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	40	-	14.2	13.2	12.2	11.1	9.9	8.6	7.0	5.1	2.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	50	14.0	13.1	12.1	11.0	9.7	8.4	6.8	4.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	60	12.9	11.9	10.8	9.5	8.1	6.5	4.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	70	11.7	10.6	9.3	7.9	6.2	3.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	80	10.4	9.1	7.7	5.9	3.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
3/4	0	-	-	-	-	-	-	14.6	14.0	13.3	12.6	11.8	11.0	10.1	9.2	8.2	7.0	5.6	3.9	-	-	-	-	-	-	382	165		
	20	-	-	-	-	-	14.4	13.8	13.1	12.3	11.6	10.7	9.9	8.9	7.8	6.6	5.1	3.2	-	-	-	-	-	-	-			-	
	30	-	-	-	15.0	14.3	13.7	13.0	12.2	11.5	10.6	9.7	8.7	7.6	6.4	4.9	2.8	-	-	-	-	-	-	-	-			-	
	40	-	-	14.9	14.2	13.6	12.9	12.1	11.3	10.5	9.6	8.6	7.5	6.2	4.6	2.4	-	-	-	-	-	-	-	-	-			-	
	50	15.4	14.8	14.1	13.5	12.7	12.0	11.2	10.3	9.4	8.4	7.3	6.0	4.3	-	-	-	-	-	-	-	-	-	-	-			-	
	60	14.7	14.0	13.3	12.6	11.9	11.1	10.2	9.3	8.2	7.1	5.7	4.0	-	-	-	-	-	-	-	-	-	-	-	-			-	
	70	13.9	13.2	12.5	11.8	10.9	10.1	9.1	8.1	6.9	5.5	3.7	-	-	-	-	-	-	-	-	-	-	-	-	-			-	
	80	13.1	12.4	11.6	10.8	9.9	9.0	7.9	6.7	5.3	3.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-			-	
1	0	-	-	-	-	-	-	-	14.8	14.2	13.7	13.1	12.5	11.8	11.1	10.4	9.6	8.8	7.9	6.9	5.7	-	-	-	-	452	195		
	20	-	-	-	-	-	14.6	14.1	13.5	12.9	12.3	11.6	10.9	10.2	9.4	8.5	7.6	6.6	5.3	3.8	-	-	-	-	-				
	30	-	-	-	-	14.5	14.0	13.4	12.8	12.2	11.5	10.8	10.1	9.3	8.4	7.5	6.4	5.1	3.5	-	-	-	-	-	-				
	40	-	-	-	15.0	14.5	13.9	13.3	12.7	12.1	11.4	10.7	9.9	9.1	8.3	7.3	6.2	4.9	3.2	-	-	-	-	-	-				
	50	-	-	14.9	14.4	13.8	13.2	12.6	12.0	11.3	10.6	9.8	9.0	8.1	7.1	6.0	4.7	2.9	-	-	-	-	-	-	-				
	60	-	14.8	14.3	13.7	13.1	12.5	11.9	11.2	10.5	9.7	8.9	8.0	7.0	5.8	4.4	2.6	-	-	-	-	-	-	-	-				
	70	14.7	14.2	13.6	13.0	12.4	11.8	11.1	10.4	9.6	8.7	7.8	6.8	5.6	4.2	2.2	-	-	-	-	-	-	-	-	-				
	80	14.1	13.5	12.9	12.3	11.7	11.0	10.2	9.5	8.6	7.7	6.6	5.4	3.9	-	-	-	-	-	-	-	-	-	-	-				
1 1/2	0	-	-	-	-	-	-	-	-	-	15.0	14.6	14.1	13.7	13.3	12.8	12.3	11.8	11.3	10.8	10.2	9.6	8.6	6.8	4.3	590	256		
	20	-	-	-	-	-	-	-	14.9	14.4	14.0	13.6	13.1	12.6	12.2	11.7	11.1	10.6	10.0	9.4	8.8	6.9	4.5	-	-				
	30	-	-	-	-	-	-	14.8	14.4	13.9	13.5	13.0	12.6	12.1	11.6	11.1	10.5	9.9	9.3	8.7	8.0	5.9	2.9	-	-				
	40	-	-	-	-	-	14.7	14.3	13.9	13.4	13.0	12.5	12.0	11.5	11.0	10.4	9.8	9.2	8.6	7.9	7.1	4.7	-	-	-				
	50	-	-	-	-	14.7	14.2	13.8	13.4	12.9	12.4	11.9	11.4	10.9	10.3	9.7	9.1	8.5	7.7	7.0	6.1	3.2	-	-	-				
	60	-	-	-	15.0	14.6	14.2	13.7	13.3	12.8	12.4	11.9	11.3	10.8	10.2	9.6	9.0	8.3	7.6	6.8	6.0	4.9	-	-	-				
	70	-	-	14.9	14.5	14.1	13.7	13.2	12.8	12.3	11.8	11.3	10.7	10.1	9.5	8.9	8.2	7.5	6.7	5.8	4.8	3.5	-	-	-				
	80	-	14.9	14.5	14.0	13.6	13.2	12.7	12.2	11.7	11.2	10.6	10.1	9.5	8.8	8.1	7.4	6.6	5.7	4.6	3.3	-	-	-	-				

HP	PSI	Pumping Depth in Feet																										Shut-Off Head	
		20	40	60	80	100	125	150	175	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	Feet	PSI	
2	0	-	-	-	-	-	-	-	14.9	14.6	14.0	13.3	12.7	12.0	11.1	10.2	9.2	8.0	6.6	5.1	3.1	-	-	-	-	-	806	349	
	20	-	-	-	-	-	14.9	14.6	14.4	14.0	13.4	12.7	12.0	11.1	10.2	9.2	8.0	6.6	5.1	3.1	-	-	-	-	-				
	30	-	-	-	-	15.0	14.7	14.4	14.0	13.8	13.1	12.4	11.7	10.7	9.8	8.8	7.5	6.1	4.5	2.0	-	-	-	-	-				
	40	-	-	-	14.9	14.6	14.4	14.2	13.8	13.3	12.8	12.1	11.3	10.2	9.2	8.0	6.6	5.1	3.1	-	-	-	-	-	-				
	50	-	-	14.9	14.6	14.4	14.1	13.8	13.4	13.1	12.4	11.6	10.8	9.8	8.8	7.6	6.1	4.7	2.2	-	-	-	-	-	-	-			
3	0	-	-	-	-	-	-	-	-	-	14.7	14.3	13.8	13.3	12.8	12.3	11.8	11.0	10.2	9.5	8.7	7.6	6.4	5.3	4.1	-	1100	476	
	20	-	-	-	-	-	-	-	-	14.7	14.3	13.8	13.3	12.8	12.3	11.8	11.0	10.2	9.5	8.7	7.6	6.4	5.3	4.1	-				
	30	-	-	-	-	-	-	14.7	15.0	14.5	14.1	13.6	13.1	12.6	12.1	11.4	10.7	10.0	9.2	8.2	7.1	6.0	4.9	3.3	-				
	40	-	-	-	-	-	-	15.0	14.7	14.3	13.8	13.3	12.8	12.3	11.8	11.0	10.2	9.5	8.7	7.6	6.4	5.3	4.1	-	-				
	50	-	-	-	-	-	15.0	14.8	14.6	14.1	13.7	13.2	12.7	12.2	11.7	10.9	10.1	9.4	8.6	7.5	6.2	5.0	3.9	-	-				
	60	-	-	-	-	15.0	14.8	14.6	14.4	13.9	13.4	12.9	12.4	11.9	11.2	10.4	9.7	8.8	7.9	6.6	5.5	4.3	-	-	-				





STANLEY PUMP SUPPLY LTD.
"Suppliers of Quality Water Well Products."

2025



MGS *STAINLESS STEEL*

15 G.P.M.

Model #	H.P.	Volts	Phases	Stages	Disch.	Wt.	List
B15P4MS05231	1/2	230	1	6	1 1/4"	30	\$1890.00
B15P4MS07231	3/4	230	1	8	1 1/4"	33	\$2568.00
B15P4MS10231	1	230	1	10	1 1/4"	37	\$2761.00
B15P4MS15231	1 1/2	230	1	12	1 1/4"	44	\$3483.00

20 G.P.M.

Model #	H.P.	Volts	Phases	Stages	Disch.	Wt.	List
B20P4MS07231	3/4	230	1	6	1 1/4"	36	\$2360.00
B20P4MS10231	1	230	1	7	1 1/4"	39	\$2811.00
B20P4MS15231	1 1/2	230	1	9	1 1/4"	42	\$3022.00

***CONTROL BOX NOT INCLUDED. SEE PAGE 3-18 & 3-19**

PLEASE CALL FOR PRICING ON 2 - 5 HP MODELS

2025



STANLEY PUMP SUPPLY LTD.

"Suppliers of Quality Water Well Products."



MGS **STAINLESS STEEL**

30 G.P.M.

Model #	H.P.	Volts	Phases	Stages	Disch.	Wt.	List
B30P4MS10231	1	230	1	5	2"	37	\$2685.00
B30P4MS15231	1 1/2	230	1	6	2"	39	\$2763.00

CONTROL BOX NOT INCLUDED. SEE PAGE 3-18 & 3-19

PLEASE CALL FOR PRICING ON 2 - 5 HP MODELS





STANLEY PUMP SUPPLY LTD.

"Suppliers of Quality Water Well Products."

2025

PUMP PERFORMANCE for MGS

15 GPM (Capacity in U.S. Gallons Per Minute)

PUMP PERFORMANCE (CAPACITY IN GALLONS PER MINUTE)																								
15 GALLONS PER MINUTE																								
HP	PSI	Pumping Depth in Feet																			Shut-off Head			
		0	20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	320	340	360	380	400	Feet	PSI
1/2	0	-	-	20.5	19.2	17.8	16.3	14.7	12.8	10.5	7.5	-	-	-	-	-	-	-	-	-	-	-	201	87
	20	20.1	18.8	17.4	15.8	14.1	12.1	9.7	6.2	-	-	-	-	-	-	-	-	-	-	-	-			
	30	18.6	17.1	15.6	13.8	11.8	9.2	5.5	-	-	-	-	-	-	-	-	-	-	-	-	-			
	40	16.9	15.3	13.5	11.4	8.8	4.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	50	15.1	13.2	11.0	8.3	3.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	60	12.9	10.7	7.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	70	10.3	7.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	80	6.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
3/4	0	-	-	-	20.2	19.2	18.2	17.1	15.9	14.7	13.3	11.7	9.8	7.5	3.6	-	-	-	-	-	-	-	269	116
	20	20.8	19.9	18.9	17.9	16.7	15.5	14.2	12.8	11.2	9.2	6.6	-	-	-	-	-	-	-	-	-			
	30	19.7	18.7	17.7	16.6	15.4	14.0	12.6	10.9	8.8	6.1	-	-	-	-	-	-	-	-	-	-			
	40	18.6	17.5	16.4	15.2	13.8	12.3	10.6	8.5	5.5	-	-	-	-	-	-	-	-	-	-	-			
	50	17.3	16.2	15.0	13.6	12.1	10.3	8.1	4.8	-	-	-	-	-	-	-	-	-	-	-	-			
	60	16.0	14.8	13.4	11.8	10.0	7.7	4.0	-	-	-	-	-	-	-	-	-	-	-	-	-			
	70	14.5	13.1	11.5	9.7	7.3	3.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	80	12.9	11.3	9.3	6.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
1	0	-	-	-	-	20.4	19.6	18.7	17.8	16.9	15.9	14.8	13.6	12.3	10.9	9.3	7.3	4.5	-	-	-	-	336	145
	20	-	21.0	20.2	19.3	18.5	17.5	16.6	15.5	14.4	13.2	11.9	10.4	8.7	6.6	3.2	-	-	-	-	-			
	30	20.9	20.1	19.2	18.3	17.4	16.4	15.4	14.3	13.0	11.7	10.2	8.4	6.2	2.4	-	-	-	-	-	-			
	40	19.9	19.1	18.2	17.3	16.3	15.2	14.1	12.8	11.5	9.9	8.1	5.7	-	-	-	-	-	-	-	-			
	50	18.9	18.0	17.1	16.1	15.0	13.9	12.6	11.3	9.7	7.8	5.3	-	-	-	-	-	-	-	-	-			
	60	17.9	17.0	15.9	14.9	13.7	12.4	11.0	9.4	7.5	4.8	-	-	-	-	-	-	-	-	-	-			
	70	16.8	15.8	14.7	13.5	12.2	10.8	9.1	7.1	4.2	-	-	-	-	-	-	-	-	-	-	-			
	80	15.6	14.5	13.3	12.0	10.6	8.8	6.7	3.6	-	-	-	-	-	-	-	-	-	-	-	-			
1 1/2	0	-	-	-	-	20.5	19.9	19.2	18.5	17.8	17.1	16.3	15.5	14.7	13.7	12.8	11.7	10.5	9.1	7.5	5.3	-	403	174
	20	-	20.9	20.3	19.7	19.0	18.3	17.6	16.9	16.1	15.3	14.4	13.4	12.4	11.3	10.1	8.7	6.9	4.3	-	-	-		
	30	20.8	20.2	19.6	18.9	18.2	17.5	16.7	16.0	15.1	14.2	13.3	12.3	11.2	9.9	8.4	6.6	3.8	-	-	-	-		
	40	20.1	19.5	18.8	18.1	17.4	16.6	15.8	15.0	14.1	13.1	12.1	11.0	9.7	8.2	6.2	3.0	-	-	-	-	-		
	50	19.4	18.7	18.0	17.3	16.5	15.7	14.9	14.0	13.0	11.9	10.8	9.5	7.9	5.9	1.8	-	-	-	-	-	-		
	60	18.6	17.9	17.1	16.4	15.6	14.7	13.8	12.8	11.8	10.6	9.2	7.6	5.5	-	-	-	-	-	-	-	-		
	70	17.8	17.0	16.3	15.4	14.6	13.7	12.7	11.6	10.4	9.0	7.3	5.1	-	-	-	-	-	-	-	-	-		
	80	16.9	16.1	15.3	14.4	13.5	12.5	11.4	10.2	8.8	7.0	4.6	-	-	-	-	-	-	-	-	-	-		

HP	PSI	Pumping Depth in Feet																				Shut-Off Head		
		20	40	60	80	100	125	150	175	200	250	300	350	400	450	500	550	600	650	700	750	800	Feet	PSI
2	0	—	—	—	—	—	—	20.7	20.2	19.6	18.3	16.9	14.4	11.6	7.4	2.7							525	227
	20	—	—	—	21.2	20.9	20.2	19.7	19.1	18.4	17.0	14.7	11.8	7.8	3.2									
	30	—	—	21.2	20.8	20.3	19.7	19.1	18.5	17.9	16.1	13.5	10.2	5.5										
	40	—	21.1	20.6	20.2	19.8	19.2	18.6	17.9	17.1	14.9	12.0	8.1	3.4										
	50	21.1	20.6	20.1	19.7	19.2	18.6	17.9	17.1	16.2	13.6	10.8	6.0											
	60	20.5	20.1	19.6	19.1	18.7	18.0	17.2	16.2	15.1	12.2	8.6	3.7											
3	0	—	—	—	—	—	—	—	—	21.0	20.2	19.5	18.7	17.8	16.6	15.0	13.0	10.8	8.0	4.9	1.6		770	333
	20	—	—	—	—	—	—	21.1	20.8	20.3	19.5	18.8	17.9	16.7	15.1	13.2	11.1	8.3	5.2	1.9				
	30	—	—	—	—	—	21.2	20.8	20.3	19.9	19.2	18.3	17.4	16.1	14.3	12.2	10.4	7.0	3.5	3.6				
	40	—	—	—	21.6	21.2	20.9	20.4	19.9	19.6	18.8	18.0	16.8	15.2	13.4	11.2	8.4	5.4	2.1					
	50	—	—	21.6	21.1	20.9	20.4	20.0	19.7	19.2	18.4	17.5	16.2	14.4	12.3	10.5	7.1	3.8						
	60	—	21.4	21.1	20.8	20.5	20.0	19.7	19.3	18.9	18.0	16.9	15.3	13.5	11.4	8.8	5.5							

2025



STANLEY PUMP SUPPLY LTD.

"Suppliers of Quality Water Well Products."

PUMP PERFORMANCE for MGS

20 GPM (Capacity in U.S. Gallons Per Minute)

PUMP PERFORMANCE (CAPACITY IN GALLONS PER MINUTE)																									
20 GALLONS PER MINUTE																									
HP	PSI	Pumping Depth in Feet																				Shut-Off Head			
		0	20	40	60	80	100	120	140	160	180	200	220	240	260	280	300	320	340	360	380	400	Feet	PSI	
3/4	0	-	-	-	-	26.9	25.0	23.0	20.7	18.1	15.1	11.3	4.9	-	-	-	-	-	-	-	-	-	225	97	
	20	-	-	26.3	24.4	22.3	19.9	17.3	14.1	9.8	-	-	-	-	-	-	-	-	-	-	-	-			
	30	27.9	26.1	24.1	21.9	19.6	16.8	13.5	9.0	-	-	-	-	-	-	-	-	-	-	-	-	-			
	40	25.8	23.8	21.6	19.2	16.4	12.9	8.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	50	23.4	21.2	18.8	15.9	12.3	7.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	60	20.9	18.3	15.4	11.6	5.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			-
	70	17.9	14.9	10.9	3.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			-
	80	14.3	10.2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			-
1	0	-	-	-	-	27.9	26.4	24.7	23.0	21.0	18.9	16.5	13.6	10.0	2.8	-	-	-	-	-	-	-	262	114	
	20	-	-	27.5	25.9	24.2	22.4	20.4	18.2	15.7	12.6	8.5	-	-	-	-	-	-	-	-	-	-			
	30	-	27.2	25.6	23.9	22.1	20.1	17.8	15.2	12.1	7.6	-	-	-	-	-	-	-	-	-	-	-			
	40	27.0	25.4	23.7	21.8	19.7	17.5	14.8	11.5	6.6	-	-	-	-	-	-	-	-	-	-	-	-			
	50	25.1	23.4	21.5	19.4	17.1	14.3	10.9	5.5	-	-	-	-	-	-	-	-	-	-	-	-	-			
	60	23.1	21.2	19.1	16.7	13.9	10.3	3.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	70	20.9	18.7	16.3	13.4	9.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
	80	18.4	15.9	12.9	8.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
1 1/2	0	-	-	-	-	-	-	27.9	26.8	25.6	24.4	23.1	21.7	20.2	18.6	16.9	15.0	12.7	10.0	6.1	-	-	375	162	
	20	-	-	-	-	27.5	26.4	25.2	24.0	22.6	21.3	19.8	18.1	16.3	14.3	12.0	9.0	4.1	-	-	-	-			
	30	-	-	-	27.4	26.2	25.0	23.8	22.4	21.0	19.5	17.9	16.0	14.0	11.6	8.4	2.6	-	-	-	-	-			
	40	-	-	27.2	26.0	24.8	23.6	22.2	20.8	19.3	17.6	15.7	13.6	11.1	7.8	-	-	-	-	-	-	-			
	50	-	27.0	25.8	24.6	23.4	22.0	20.6	19.0	17.3	15.4	13.3	10.7	7.2	-	-	-	-	-	-	-	-			
	60	26.8	25.7	24.4	23.2	21.8	20.3	18.8	17.0	15.1	12.9	10.2	6.5	-	-	-	-	-	-	-	-	-			
	70	25.5	24.2	23.0	21.6	20.1	18.5	16.8	14.8	12.5	9.7	5.6	-	-	-	-	-	-	-	-	-	-			
	80	24.1	22.7	21.4	19.9	18.2	16.5	14.5	12.2	9.2	4.7	-	-	-	-	-	-	-	-	-	-	-			

HP	PSI	Pumping Depth in Feet																												Shut-Off Head	
		20	40	60	80	100	125	150	175	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	Feet	PSI			
2	0	—	—	—	—	—	—	—	—	—	23.2	20.2	16.2	8.5														420	275		
	20	—	—	—	—	—	26.1	24.9	23.4	20.6	16.7	9.5																			
	30	—	—	—	—	—	26.2	25.0	23.5	22.1	19.1	13.8	4.8																		
	40	—	—	—	—	26.4	25.1	23.7	22.2	20.8	17.2	10.1																			
	50	—	—	—	26.1	25.1	23.8	22.3	20.9	19.3	14.0	5.7																			
60	—	—	26.0	25.0	23.9	22.4	21.0	19.4	17.3	10.8																					
3	0	—	—	—	—	—	—	—	—	—	25.3	23.5	21.3	19.1	16.0	11.3	3.6											605	349		
	20	—	—	—	—	—	—	—	—	25.4	23.6	21.6	19.3	16.1	12.0	5.0															
	30	—	—	—	—	—	—	—	26.6	24.8	22.7	20.6	18.1	14.5	9.0																
	40	—	—	—	—	—	—	26.7	25.5	23.8	21.7	19.6	16.8	12.5	5.3																
	50	—	—	—	—	—	26.7	25.6	24.9	22.8	20.8	18.5	15.0	9.5																	
60	—	—	—	—	—	26.8	25.7	24.9	23.9	21.8	19.8	16.9	12.7	5.6																	
5	0	—	—	—	—	—	—	—	—	—	—	—	—	26.5	25.2	24.0	22.8	21.5	20.2	18.9	17.0	14.3	11.0	6.8				1005	476		
	20	—	—	—	—	—	—	—	—	—	—	—	26.6	25.3	24.1	22.9	21.6	20.3	19.0	17.3	14.0	11.2	7.3								
	30	—	—	—	—	—	—	—	—	—	—	—	26.0	24.9	23.5	22.2	21.0	19.9	18.2	16.2	13.3	9.5	5.2								
	40	—	—	—	—	—	—	—	—	—	—	—	26.7	25.4	24.2	22.9	21.7	20.4	19.1	17.5	14.4	11.5	7.7	3.1							
	50	—	—	—	—	—	—	—	—	—	—	—	26.0	25.0	23.6	22.3	21.1	20.0	18.4	16.3	13.5	9.9	5.7								
60	—	—	—	—	—	—	—	—	—	26.8	25.5	24.3	23.0	21.8	20.5	19.2	17.7	14.9	12.0	8.0	3.7										



STANLEY PUMP SUPPLY LTD.
"Suppliers of Quality Water Well Products."

2025

PUMP PERFORMANCE for MGS

30 GPM (Capacity in U.S. Gallons Per Minute)

30 Gallons per Minute				PUMP PERFORMANCE (Capacity in Gallons Per Minute)																		
HP	PSI	Pumping Depth in Feet																			Shut-Off Head	
		20	40	60	80	100	125	150	175	200	250	300	350	400	450	500	550	600	650	700	Feet	PSI
1	0	—	—	40.9	39.1	36.8	32.5	26.0	8.0												175	76
	20	40.4	38.8	36.0	32.4	27.7	13.3															
	30	38.0	35.3	31.7	26.3	14.3																
	40	35.0	31.4	25.9	12.1																	
	50	30.2	24.0	3.0																		
	60	21.9																				
1-1/2	0	—	—	—	39.9	37.5	34.1	30.9	26.9	17.0											210	91
	20	41.2	39.1	36.5	34.0	31.5	27.8	21.5														
	30	38.9	36.1	33.8	31.0	27.9	21.8															
	40	36.0	33.5	30.8	27.7	20.2																
	50	32.9	30.1	26.8	21.5																	
	60	29.5	25.9	18.1																		
2	0	—	—	—	—	40.5	38.8	36.8	34.7	31.6	23.7										280	121
	20	—	41.3	40.1	38.7	37.1	34.9	32.1	29.0	24.8												
	30	41.2	40.0	38.5	37.0	35.0	32.2	29.1	24.9	15.2												
	40	39.9	38.3	36.6	34.8	32.7	29.8	25.1	16.1													
	50	38.0	36.3	34.5	32.1	30.0	25.3	17.5														
	60	36.0	34.0	31.9	29.1	26.0	18.0															
3	0	—	—	—	—	—	41.6	40.1	39.6	38.2	35.5	32.0	27.3								420	182
	20	—	—	—	41.5	41.0	39.8	38.5	37.1	35.7	32.1	28.0	18.5									
	30	—	—	41.3	40.6	39.9	38.7	37.2	35.8	34.2	30.3	24.9	6.0									
	40	—	41.2	40.4	39.7	38.8	37.3	35.9	34.5	32.6	28.3	19.9										
	50	41.1	40.3	39.5	38.5	37.4	36.0	34.6	32.7	31.0	25.2	9.5										
	60	40.2	39.3	38.3	37.2	36.1	34.7	32.8	31.0	28.5	20.5											
5	0	—	—	—	—	—	—	—	—	42.0	40.7	39.2	38.0	36.0	34.2	31.9	29.2	26.0	20.0		705	305
	20	—	—	—	—	—	—	42.0	41.3	40.8	39.3	38.2	36.2	34.4	32.4	30.0	26.1	21.5				
	30	—	—	—	—	—	42.1	41.4	40.8	40.1	38.7	37.0	35.1	33.1	31.1	26.0	24.1	16.0				
	40	—	—	—	—	42.1	41.5	40.9	40.2	39.3	37.9	36.1	34.3	32.0	29.4	26.2	20.4					
	50	—	—	—	42.0	41.5	41.2	40.2	39.5	38.8	37.1	35.4	33.2	31.2	28.8	24.5	16.0					
	60	—	—	42.0	41.4	41.1	40.3	39.8	38.9	38.1	36.2	34.2	32.1	30.0	26.7	22.0						

2025



STANLEY PUMP SUPPLY LTD.

"Suppliers of Quality Water Well Products."

PUMP PERFORMANCE for MGS

50 GPM (Capacity in U.S. Gallons Per Minute)

50 Gallons per Minute		PUMP PERFORMANCE (Capacity in Gallons Per Minute)																	
HP	PSI	Pumping Depth in Feet																Shut-Off Head	
		20	40	60	80	100	125	150	175	200	250	300	350	450	550	650	700	Feet	PSI
1-1/2	0	—	—	—	58.2	49.3	33.5											145	63
	20	—	55.9	46.5	32.5														
	30	54.8	45.0	30.0															
	40	43.3	26.9																
	50	21.9																	
	60																		
2	0	—	—	—	63.3	57.0	47.8	33.9										180	78
	20	—	62.2	55.1	46.8	37.1	13.0												
	30	61.1	53.6	46.0	34.3	14.1													
	40	52.8	45.0	32.5	11.0														
	50	42.7	27.9																
	60	25.2																	
3	0	—	—	—	—	64.5	59.4	52.5	45.0	33.8								235	102
	20	—	—	63.7	59.0	53.5	46.5	36.2	18.2										
	30	—	62.9	58.1	53.0	47.0	37.0	20.5											
	40	62.5	57.6	52.0	46.2	38.8	22.1												
	50	56.5	51.0	44.7	36.2	22.8													
	60	50.0	43.7	34.0	20.5														
5	0	—	—	—	—	—	—	65.9	63.2	59.9	51.9	41.9	22.5					385	166
	20	—	—	—	—	—	63.5	60.8	56.1	52.4	42.5	24.9							
	30	—	—	—	—	63.8	60.9	56.9	53.0	47.9	35.5	12.9							
	40	—	—	65.5	63.2	61.0	57.0	53.2	48.0	43.5	27.0								
	50	—	65.1	63.0	60.8	57.1	53.3	48.1	43.6	36.4	14.2								
	60	64.9	62.4	60.0	56.9	53.7	48.7	44.1	37.5	28.0									
7-1/2	0	—	—	—	—	—	—	—	—	—	66.0	61.0	55.3	43.1	20.0			595	257
	20	—	—	—	—	—	—	—	—	64.8	61.1	56.0	50.0	34.9					
	30	—	—	—	—	—	—	—	64.9	63.3	58.7	53.2	47.2	28.8					
	40	—	—	—	—	—	—	65.0	63.6	61.7	56.2	50.9	44.1	22.0					
	50	—	—	—	—	—	65.1	63.7	61.8	58.9	53.9	47.5	41.0	13.2					
	60	—	—	—	—	65.2	63.8	61.9	59.0	56.5	51.1	44.9	36.0						
10	0	—	—	—	—	—	—	—	—	—	—	65.0	62.1	54.2	44.7	29.0	15.2	745	322
	20	—	—	—	—	—	—	—	—	—	65.5	62.5	59.1	50.1	39.2	17.1			
	30	—	—	—	—	—	—	—	—	66.9	64.1	61.2	56.9	47.5	35.0	10.5			
	40	—	—	—	—	—	—	—	67.0	65.8	63.0	59.3	54.9	45.2	30.5				
	50	—	—	—	—	—	—	67.1	65.9	64.2	61.5	57.2	53.0	42.9	25.0				
	60	—	—	—	—	—	67.2	66.0	64.3	63.2	59.9	55.0	51.0	40.6	19.7				



STANLEY PUMP SUPPLY LTD.
"Suppliers of Quality Water Well Products."

2025



MGS *STAINLESS STEEL*

PUMP ENDS

Model #	H.P.	Stages	GPM	Lb. Wt.	List
Trimline					
L5P4C MGS	1/2	14	5	16	\$ 1364.00
L5P4D MGS	3/4	19	5	18	\$ 1782.00
L5P4E MGS	1	22	5	26	\$ 2043.00
L5P4F MGS	1 1/2	30	5	29	\$ 2450.00
L7P4C MGS	1/2	11	7	13	\$ 1226.00
L7P4D MGS	3/4	15	7	15	\$ 1572.00
L7P4E MGS	1	18	7	17	\$ 2025.00
L7P4F MGS	1 1/2	22	7	20	\$ 2263.00
4"					
L10P4C MGS	1/2	8	10	11	\$1091.00
L10P4D MGS	3/4	11	10	11	\$1268.00
L10P4E MGS	1	13	10	12	\$1793.00
L10P4F MGS	1 1/2	17	10	14	\$2602.00
L10P4G MGS	2	19	10	16	\$2608.00
L15P4C MGS	1/2	6	15	12	\$1062.00
L15P4D MGS	3/4	8	15	13	\$1297.00
L15P4E MGS	1	10	15	14	\$1687.00
L15P4F MGS	1 1/2	12	15	16	\$2328.00
L15P4G MGS	2	15	15	18	\$2597.00
L15P4H MGS	3	22	15	23	\$2889.00
L20P4D MGS	3/4	6	20	11	\$1361.00
L20P4E MGS	1	7	20	12	\$1628.00
L20P4F MGS	1 1/2	10	20	13	\$2121.00
L20P4G MGS	2	12	20	15	\$2273.00
L20P4H MGS	3	17	20	17	\$2849.00
L20P4J MGS	5	28	20	23	\$3078.00
L30P4EMGS	1	5	30	12	\$1949.00
L30P4FMGS	1 1/2	6	30	13	\$2162.00
L30P4GMGS	2	8	30	14	\$2482.00
L30P4HMGS	3	12	30	17	\$3443.00
L30P4JMGS	5	20	30	22	\$4166.00

PRICES SUBJECT TO CHANGE WITHOUT NOTICE

2025



STANLEY PUMP SUPPLY LTD.

"Suppliers of Quality Water Well Products."

MGS **STAINLESS STEEL** PUMP ENDS 50 GPM

Model #	H.P.	Stages	G.P.M.	List
L50P4GMGS	2	6	50	\$2885.00
L50P4HMGS	3	8	50	\$3411.00
L50P4JMGS	5	13	50	\$4647.00

CAST IRON PUMP ENDS 70 GPM

Model #	H.P.	Stages	G.P.M.	List
SL70H4	3	7	70	\$2711.00
SL70J4	5	12	70	\$3610.00

2025



STANLEY PUMP SUPPLY LTD.

"Suppliers of Quality Water Well Products."



Franklin Electric

CONTROL BOXES

For motors manufactured after March 1989

(Have no overload protection)

Model #	H.P.	Volts	List
CB50-115	1/2	115	\$226.00
CB50-230	1/2	230	\$220.00
CB75-230	3/4	230	\$230.00
CB100-230	1	230	\$223.00
CB150-230	1 1/2	230	\$345.00
CB200-230	2	230	\$580.00
CB300-230	3	230	\$731.00
CB500-230	5	230	\$1061.00

MONODRIVE CONSTANT PRESSURE CONTROLLERS

Model #	H.P.		List
SUBDRIVE	1/2 to 2	1 Phase	\$2420.00
SUBDRIVE 20	1 1/2 to 2	1 Or 3 Phase	\$3515.00



STANLEY PUMP SUPPLY LTD.
"Suppliers of Quality Water Well Products."

2025

PENTAIR CONTROL BOXES

Model #	H.P.	Volts	List
SMC-1R0511	1/2	115	\$226.00
SMC-1R0521	1/2	230	\$211.00
SMC-1R0721	3/4	230	\$223.00
SMC-1R1021	1	230	\$243.00

PENTEK INTELLIDRIVE PUMP CONTROLLERS

Model #	H.P.		List
PID 10	1/2 to 1	2 wire or 3 wire	\$3028.00
PID 20	1 1/2 to 2	2 wire or 3 wire	\$3671.00

ACCESSORIES FOR CONTROLLERS

Order #	Description	List
07M-125-MB	Bracket	\$ 40.45
TK07M-125	Manifold	\$ 123.30
PC6	Tank	\$ 169.00
PC15	Tank	\$ 230.00

PRICES SUBJECT TO CHANGE WITHOUT NOTICE



2025



STANLEY PUMP SUPPLY LTD.

"Suppliers of Quality Water Well Products."

QD **PUMPTEC**⁵ PROTECTS 1/3 HP - 1HP 230V

- Plugs into new 3-wire QD Control Boxes
- No additional wiring, no tools

\$540.00



PUMPTEC⁶ CONTROL PROTECTS 1/3 HP - 1 1/2 HP

- Monitors all 2-wire & 3 wire, 115V/230V, 1 phase, motors


\$740.00



INSIDER SPP-23IP

- With sensitivity adjustment

\$584.00

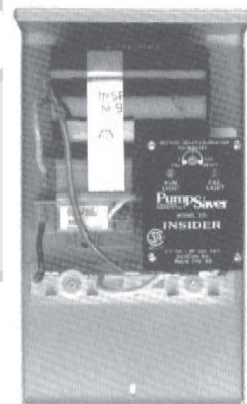



STANLEY PUMP SUPPLY LTD.
"Suppliers of Quality Water Well Products."

2025

SUBMERSIBLE CABLE

Size	Description (984')	Wt. Per Reel
14-4	TWU Stranded	135 LBS
12-4	TWU Stranded	160 LBS
10-4	TWU Stranded	220 LBS
8-4	TWU Stranded	413 LBS
6-4	TWU Stranded	950 LBS

PLEASE CALL FOR CURRENT PRICES.

CABLE SELECTION

Single Phase Motor Maximum Cable Length (Motor to Service Entrance)

MOTOR RATING		COPPER WIRE SIZE (1)												
VOLTS	HP	14	12	10	8	6	4	3	2	1	0	00	000	0000
115	1/3	130	210	340	540	840	1300	1610	1960	2390	2910	3540	4210	5060
	1/2	100	160	250	390	620	960	1190	1460	1780	2160	2630	3140	3770
230	1/3	550	880	1390	2190	3400	5250	6520	7960	9690	11770			
	1/2	400	650	1020	1610	2510	3880	4810	5880	7170	8720			
	3/4	300	480	760	1200	1870	2890	3580	4370	5330	6470	7870		
	1	250	400	630	990	1540	2380	2960	3610	4410	5360	6520		
	1 1/2	190	310	480	770	1200	1870	2320	2850	3500	4280	5240		
	2	150	250	390	620	970	1530	1910	2360	2930	3620	4480		
	3	0	190	300	470	750	1190	1490	1850	2320	2890	3610		
	5	0	0	180	280	450	710	890	1110	1390	1740	2170	2680	
	7 1/2	0	0	0	200	310	490	610	750	930	1140	1410	1720	
	10	0	0	0	0	250	390	490	600	750	930	1160	1430	1760
	15	0	0	0	0	0	270	340	430	530	660	820	1020	1260



2025



STANLEY PUMP SUPPLY LTD.

"Suppliers of Quality Water Well Products."

DIRECT BURIAL WIRE

NMW14-2x75m/spool

NMW14-2x150m/spool

NMW12-2x75m/spool

NMW12-2x150m/spool

NMW10-2x75m/spool

NMW10-2x150m/spool

NMW12-3x75m/spool

NMW12-3x150m/spool

NMW10-3x75m/spool

NMW10-3x150m/spool

PLEASE CALL FOR CURRENT PRICES.

